



PCT/EP 03 / 1 2 0 4 1

09 DEC 2003



INVESTOR IN PEOPLE

REC'D 19 DEC 2003

WIPO

PCT

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

Received in PAT  
- 3 NOV 2003

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

I also certify that the attached copy of the request for grant of a Patent (Form 1/77) bears a correction, effected by this office, following a request by the applicant and agreed to by the Comptroller-General.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely re-registers the company to certain additional company law rules.

Signed

*Andrew Jones*

Dated

30 October 2003

**PRIORITY  
DOCUMENT**

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

**BEST AVAILABLE COPY**

Patents Form 1/77

Patent of 1977  
(Rule 20)



310CT02 E759770-1 000173  
P01/7700 0.00-0225273.2



**Request for grant of a patent**

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP10 8QQ

1. Your reference

SPE 02/12

2. Patent application number

(The Patent Office will fill in this part)

0225273.2

30 OCT 2002

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Solvay Polyolefins Europe, (SA)  
rue du Prince Albert 44  
1050 Bruxelles  
BELGIUM

BELGIUM

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

84 95202 001

4. Title of the invention

POLYMER TREATMENT

5. Name of your agent (if you have one)

SMITH, Julian Philip Howard

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

BP International Limited  
Patents & Agreements  
Chertsey Road  
Sunbury-on-Thames  
Middlesex, TW16 7LN  
UNITED KINGDOM

Patents ADP number (if you know it)

7058985001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)

Date of filing  
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

YES

- a) any applicant named in part 3 is not an inventor, or
  - b) there is an inventor who is not named as an applicant, or
  - c) any named applicant is a corporate body.
- See note (d))

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description 12

Claim(s) 2

Abstract 1

Drawing(s) 2

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature

SMITH, Julian Philip Howard

Date 30th October 20

12. Name and daytime telephone number of person to contact in the United Kingdom (01932) 764092

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

### POLYMER TREATMENT

The present invention relates to a process for the removal of volatile material from particulate polymer, and more especially to the removal of traces of volatile constituents from pelletised polymer, polymer powder or granular polymeric material.

5 Whilst the present invention can in principle be applied to any particulate polymer for the removal of volatiles therefrom, the following description refers primarily to the application of the process to the removal of volatiles from particulate polyolefins.

Polyolefins prepared by catalytic polymerisation or copolymerisation of olefins, for example, ethylene, propylene or higher olefins such as C<sub>4</sub> to C<sub>12</sub> alpha-olefins, are generally subjected to a process for removal of the bulk of the unreacted monomer  
10 before being processed into useful articles. Such processes for removal of unreacted monomer generally involve a monomer separation and recovery procedure wherein the bulk of the unreacted monomer associated with the polyolefin product is separated therefrom when the polyolefin is first removed from the polymerisation reactor.

Processes for this initial monomer separation and recovery depend on the particular  
15 technology being employed for the polymerisation reaction. For example, in the gas phase (co)polymerisation of olefins, the polyolefin product is normally a fine powder fluidised by, or stirred in, an atmosphere comprising the gaseous monomer(s).

Monomer may be separated and recovered from the gas phase process, for example, by isolating a continuous stream of particulate polymer product associated with at least  
20 some gas, and optionally some liquid, comprising unreacted monomer; reducing the pressure and recycling the volatile components to the reactor; and purging the polymer component with inert gas, for example, nitrogen or carbon dioxide.

Thus the volatile materials referred to throughout this specification can be, for example, the monomer or monomers themselves, oligomers, any solvent or diluent used in the polymerisation, the catalyst materials or products derived therefrom, additives in the polymerisation (e.g. molecular weight regulators), impurities present in any of the materials used in the polymerisation, or materials employed for lubricating moving parts of the reactors. Such volatile substances can also arise from degradation or inter-reaction of the polymerisation components themselves and/or their products. The presence of such volatile substances in the final polymer is generally undesirable and can result, for example, in unwanted odour in articles manufactured therefrom, or can produce taint in foodstuffs packed in containers fabricated from the polymer, or in water from potable water piping systems. The presence of inflammable volatile materials can also present a fire or explosion hazard. Likewise, such volatile materials can have toxic, irritant or other undesirable pharmacological properties which normally render their removal desirable or even essential.

The production of volatile substances in the polymer can also occur during pelletisation of the polymer, for example, by thermal degradation of the polymer itself, or by the degradation of additives employed in the pelletising process.

GB-A-1272778 relates to a process for the removal of volatile constituents from particulate olefin polymers which have been produced by the gas phase polymerisation of the monomers for example of ethylene or propylene, by treating a layer of the polymer, whose particles have a mean diameter of from 10 to 5000 microns, with a stream of inert gas at a temperature of from at least +80°C, to at least 5°C below the crystallite melting of the polymer in the treatment zone while keeping the layer in vigorous motion.

EP-A-0047077 relates to a process for removing unpolymerised gaseous monomers from solid olefin polymers by conveying the polymer (e.g. in granular form) to a purge vessel, contacting the polymer in the purge vessel with a countercurrent inert gas purge stream to strip away the monomer gases which are evolved from the polymer, and recycling a portion of the resulting inert gas-monomer gas stream to the purge vessel.

---

The present invention is concerned with an improved method for the removal of traces of volatile material, e.g. unreacted monomer, oligomers or other volatile

constituents such as solvent or degradation products; from particulate polymeric materials, especially polymers prepared by the catalytic polymerisation of organic monomers.

5 In particular, the present invention is concerned with removal of volatile materials from particulate polymeric materials, preferably particulate polyolefins, which have previously been subjected to at least one process for separation of the unreacted monomer, for example, by processes such as those described in GB-A-1272778 and EP-A-047077.

10 The present invention provides a process for the separation of volatile material from particulate polymer which has been substantially freed from unreacted monomer in an earlier separation step, comprising

- (a) feeding the particulate polymer to a purge vessel and causing it to move through the vessel in substantially plug-flow mode,
- (b) heating the particulate polymer in the purge vessel to a temperature greater than 15 30°C but insufficiently high to cause the particles to become agglomerated, and/or maintaining the polymer at a temperature in this range in the purge vessel,
- (c) feeding gas to the purge vessel counter-current to the movement of the particulate polymer to remove volatile material therefrom,
- (d) removing the particulate polymer from the purge vessel,

20 wherein substantially all of the heating of the particles which occurs in the purge vessel is accomplished by preheating the gas fed into the purge vessel.

By "plug flow mode" is meant throughout this specification that the flow of particulate polymer through the relevant vessel occurs in such a manner that there is little or no axial mixing as the particulate polymer travels through the vessel, thus 25 ensuring that the residence time of the particles is substantially uniform. "Plug flow" is sometimes referred to in the art as "mass flow", especially where the flow under consideration is movement of solid particulate materials.

In the process of the present invention the flow characteristics of the particulate polymer in the purge vessel are such that the standard deviation of the residence time is 30 preferably not greater than 20%, and even more preferably not greater than 10% of the mean residence time of the particulate polymer in the purge vessel.

The particulate polymer from which it is desired to remove volatile material can

be, for example, polymer powder, pelletised polymer or granular material which has already been subjected to a primary monomer separation step. In the case that the particulate polymer has been prepared in the presence of a transition metal-containing catalyst, preferably any catalyst residues present in the polymer have been deactivated prior to treating the polymer in accordance with the process of the present invention. Preferably the particulate polymer is polyolefin powder, pellet or granular material having been prepared by polymerisation or (co)polymerisation of one or more monomeric 1-olefins, in the gas phase, the liquid phase (e.g. using so-called "particle form" polymerisation conditions), or the solution phase, or from the high temperature high pressure process (often referred to as the "high pressure process"). Alternatively, the particulate polyolefin can be polyolefin which has been converted into another particulate form, e.g. by granulation or pelletising. Preferably the particulate polyolefin is a pelleted polymer, more preferably a pelleted polyolefin. Accordingly it is also preferred that prior to entry into the purge vessel, the particulate polyolefin has passed through an extruder to be pelletised.

The quantity of volatile material (excluding water) present in the polymer fed to the purge vessel is preferably not greater than 500 ppm (parts per million by weight), more preferably not greater than 60 ppm, and even more preferably not greater than 30 ppm.

The particulate polymer fed to the purge vessel can be preheated before entering the purge vessel, or can be heated solely in the purge vessel itself. The particulate polymer can be fed to the preheating vessel intermittently, continuously, as a batch or in batches. Preferably it is fed continuously. Preferably the particulate polymer moves through the preheating vessel in substantially plug-flow mode. The temperature to which the particulate polymer is heated in the preheating vessel is suitably at least 30°C, preferably at least 50°C, most preferably at least 70°C or higher, provided that the temperature is insufficiently high to cause the particles to become agglomerated. As a rough guide, the temperature should not be greater than about 5°C below the Vicat softening temperature. The particulate polymer is preferably fed to the heating vessel using a pneumatic conveying technique. If a preheating vessel is employed, it can, if desired, be provided with means to pass a purge gas countercurrent to the movement of the particulate polymer through the vessel. If desired, hot gas, e.g. hot nitrogen or hot

gas, can be used to heat the particulate polymer in the preheating vessel. Preferably the preheating vessel is heated using conventional industrial equipment, for example, steam or hot water jacketing.

The particulate polymer fed to the heating vessel (if one is employed) or to the purge vessel can contain residual water (e.g. surface moisture arising from cold water quenching of pellet produced directly from a pelleting machine), provided the quantity of heat provided and the rate of flow of gas through the vessel are sufficient to dry the particulate polymer well before it emerges from the purge vessel. Preferably the particulate polymer is substantially free from water before being fed to the purge vessel.

In the case that the particulate polymer is pelleted, the pellet can, if desired, be fed directly from the pelletising machine to the purge vessel, or to the heating vessel if one is employed. Feeding pellet to the purge vessel or to the heating vessel direct from the pelletising machine can make further savings in energy requirements, especially if the pellet discharge from said machine still contains residual heat from the pelletising process. This saving in energy can be optimised, for example, by suitable adjustment of the temperature of the quench water such that the pellet remains relatively hot after the quench, but not so hot that agglomeration of the pellets can occur.

The particulate polymer is fed to the purge vessel in any convenient manner, for example, using pneumatic conveying or by means of gravity feed devices employing suitable feeder valve means between the source and the purge vessel. It is preferred to feed the particulate polymer continuously to the purge vessel.

The residence time of the particles in the vessel is substantially the same for all the particles. Plug flow can be achieved using conventional industrial equipment. Thus it is preferred to employ a purge vessel with smooth internal walls and having uniform cross section throughout a major portion of its length. A frustro-conical or other tapering cross section, for example, at the exit of the purge vessel, can be used provided that the angle of the discharge cone is calculated so as to ensure the plug flow qualities of the vessel (the angle can be calculated from shear test results, and depends on the nature of the particulate polymer being treated). The principles of plug flow are well known in the art and suitable apparatus can be readily designed adopting these principles. The purge vessel is preferably tubular and of substantially uniform cross section. The major portion may take the form, for example, of a tube having square or



circular cross section. The purge vessel is most preferably a vertically disposed cylindrical vessel having a conical section at the base which tapers towards an outlet for the polymer located at the bottom of the vessel. Preferably the purge vessel is vertically disposed. Most preferably the purge vessel is of uniform cylindrical cross section throughout a major part of its length, and has a length at least twice its diameter in order to help ensure plug flow.

In one embodiment plug flow is achieved in a cylindrical vessel by selection of a particular valve to control the discharge opening. The valve is in the form of an upturned cone seated on a frustoconical seat, thereby defining an annular passageway when the valve is open. Such an arrangement can prevent rapid discharge of polymer through the centre of the purge vessel, which may result in non-plug flow. When operating with such an arrangement, it is preferred that the valve is not continuously open, but does so intermittently; this has been found to be best to ensure plug flow. Preferably the valve is open half the time; a typical cycle is 1-3 minutes open, with the same amount of time closed, although the exact time will of course depend on the size of the vessel.

The rate of flow and the dimensions of the purge vessel are suitably arranged so that the residence time of the particulate polymer in the purge vessel lies in the range from about 0.5 to 16 hours, preferably 2 to 16 hours, more preferably 6 to 12 hours. For certain applications, at least 10 hours is required.

The temperature to which the particulate polymer is heated in the purge vessel is suitably at least 30°C, preferably at least 50°C, most preferably at least 70°C or higher, provided that the temperature is insufficiently high to cause the particles to become agglomerated. As mentioned above, as a rough guide, the temperature is preferably not greater than about 5°C below the Vicat softening temperature. For example, if the Vicat softening temperature is 80°C, the maximum temperature to which the particulate polymer is heated should preferably not be greater than 75°C. In the case that the particulate polymer is high density polyethylene having a density of at least 0.945 kg/m<sup>3</sup>, the temperature of the heating in the purge vessel is preferably in the range 70 to 100°C. On the other hand, in the case that the particulate polymer is a lower density copolymer, for example, a copolymer of ethylene with a higher 1-olefin, e.g. having a density in the range 0.915 to 0.945 kg/m<sup>3</sup>, the said temperature preferably lies in the

range 60 to 80°C. In any event the temperature must be insufficiently high to cause the particles to become agglomerated. Failure to observe this can result in the polymer becoming blocked in the preheating or purge vessels, or even forming an intractable mass within these vessels.

5       The particulate polymer may be moved through the purge vessel using any suitable means of motivation, for example using an Archimedean screw device or merely under the influence of gravity. Preferably however the particulate polymer moves under the influence of gravity in response to the discharge of solid from the base of the purge vessel. Preferably the purge vessel is insulated to retain heat during  
10 purging.

Gas is passed through the purge vessel counter current to the flow of the particulate polymer therein. By "counter current" is meant that the gas is passed across or against the flow of the particles. The gas is heated prior to injection into the purge vessel. Normally the gas is air. However if desired the air can be supplemented with  
15 another gas or gases, for example, nitrogen or carbon dioxide, e.g. if it is desired to reduce any potential risk of fire or explosion. However, the present invention is generally applied to the reduction of volatiles in particulate polymer in which the content of volatiles is already at a relatively low level. Accordingly, the level of volatiles present in the purge gas stream exiting from the purge vessel is normally not  
20 more than about 5 milligrams per litre of gas, preferably not more than about 1 milligram per litre of gas. A particularly preferred level is less than 150g/m<sup>3</sup>. The rate of flow of gas through the particulate polymer is maintained at a level below that which would cause disruption of the plug flow of the particulate polymer. This is well below the rate of flow which would cause fluidisation of the particulate polymer. In the case  
25 of pelleted polymer, the rate of flow of gas that can be tolerated before the onset of disruption of the plug flow is generally substantially higher than for powdery polymer. Preferably the rate of flow of gas is at least 0.5 litres per hour per square centimetre of cross section measured radially across the direction of flow of particulate polymer through the purge vessel (units hereinafter abbreviated to litres hour<sup>-1</sup>cm<sup>-2</sup>). Thus for  
30 example, rates of flow of gas from 2 to 10 litres hour<sup>-1</sup>cm<sup>-2</sup> through the purge vessel are particularly useful. Substantially higher rates e.g. of 10 to 50 litres hour<sup>-1</sup>cm<sup>-2</sup> can be employed if desired provided that, where the particulate polymer flows through the

purge vessel in a substantially plug-flow manner, the plug flow mode of the particulate polymer does not become disrupted thereby.

Although all of the gas may be introduced into the purge vessel close to its bottom and blown upwards through the particulate polymer, this requires the use of significant pressure. We have found that removal of volatiles can be just as effective if the majority of the hot gas is introduced into the purge vessel close to the top where the particulate polymer enters, with only a relatively small proportion of the gas being introduced at the bottom. Introducing gas close to the top of the vessel requires a much lower pressure, as of course does introducing a much smaller mass flow of gas at the bottom. It is believed that this arrangement is just as effective because once the polymer is heated, only a relatively small air flow across it is required in order to remove the volatile compounds. Thus the most efficient means of achieving hot particulate polymer having a flow of gas across it is to introduce the majority of the gas required to keep the polymer close to the top of the vessel. Accordingly it is preferred that at least a portion of the gas entering the purge vessel does so that one or more points close to the top of the purge vessel; and it is preferred that each of said one or more points are located at a level such that less than 20% of the volume of particles in the vessel lie above that level when the vessel contains the maximum quantity of particulate polymer. It is also preferred that no more than 20%, more preferably no more than 10% of the total mass of gas entering the vessel does so close to the bottom of the vessel. It is also preferred that a portion of the gas introduced close to the top of the purge vessel is discharged directly into the middle of the vessel. This helps to avoid cold spots in the centre of the vessel: the gas is preferably introduced via an axially extending conduit. Preferably the mass flow of gas introduced by this central conduit is about 20-40%, typically approximately one-third, that introduced into the side of the vessel at the same level. Generally, it will be understood that the precise location of gas entry points, gas flowrates at each entry point and also purge vessel dimensions are calculated in each individual case depending on the particulate polymer being treated, and the flowrate of the polymer, so as to obtain a uniform gas distribution and efficient heating/devolatilising.

---

Whilst substantially all of the heating of the particulate polymer is caused by the hot gas, the invention does not exclude the possibility of some auxiliary heating means

being present, such as a heat exchanger positioned centrally near the top of the purge vessel so as to ensure adequate heating at the centre of the vessel.

The pressure in the purge vessel can be any desired pressure, but in practice the use of a pressure close to atmospheric pressure (e.g. slightly above 1 bar absolute but less than 200mbarg) is generally satisfactory as this avoids the need to use expensive pressure vessels and blowers. In practice the introduction of the purge gas into the purge vessel will generally cause a slight increase of pressure therein.

Volatile materials diffuse from the particulate polymer in the purge vessel into the gas stream and are carried counter current to the movement of the particulate polymer towards the region where the particulate polymer is fed to the vessel. The gas is preferably vented from the purge vessel using suitable piping means. The vented gas containing the volatiles can be fed to a flare stack or, if it is desired to recover any volatile components, for example, it may be fed to a suitable recovery unit. Frequently it is found that the concentration of volatiles is so small (less than  $150\text{mg/m}^3$ ) that the gas from the purge vessel can be vented direct to the atmosphere. Preferably the process conditions are maintained such that the concentration of any inflammable volatile materials in the gas vented from the purge vessel provide less than 25%, preferably less than 5% of the flammability limit of the gas. The concentration of such volatile materials can be reduced, for example, by reducing one or more of the following: (1) the standing volume of particulate polymer in the purge vessel, (2) the rate of flow of the particulate polymer through the purge vessel and (3) the temperature of the particulate polymer in the purge vessel: or by increasing the rate of flow of the gas through the purge vessel.

The particulate polymer is suitably removed from the purge vessel simply by force of gravity. However this may be assisted by conventional industrial conveying means for particulate materials, for example motorised valves or a rotary airlock. Preferred mechanical withdrawal means include variable rate withdrawal means, for example, variable speed motorised valves or motorised screws. The vessel is preferably equipped with means to detect the quantity or level of particulate polymer therein, for example a means to detect the level of settled particulate polymer in the vessel. Preferably the means to detect the quantity or level of particulate polymer within the vessel is coupled with the variable rate withdrawal means, for example, to maintain a

constant volume of particulate polymer within the vessel. The coupling may be achieved, for example, by electronic means or mechanical means.

After the particulate polymer has passed through the purge vessel it is normally still hot and may require cooling before being transferred to storage or undergoing further treatment or processing. For example, in the case of polyethylene, if it is desired to transfer the particulate polymer to storage using dilute or dense phase pneumatic conveying means, it is preferred to cool it to a temperature below about 65°C, typically 40-60°C, before transfer to reduce the possibility of so called "angel hair" forming in the pneumatic conveying lines. The means used to cool the particulate polymer, if any, can comprise, for example, conventional industrial particulate cooling equipment. Air or water cooling may be used. For example, the hot particulate polymer can be fed to a gas fluidised bed cooler operating under batch or continuous conditions. Air used for cooling can subsequently be introduced into the feed of the hot air to be introduced into the purge vessel in order to reduce heating costs.

In one embodiment, the cooling means can be incorporated at the bottom of the purge vessel in order to save on equipment costs; in this case, the design must be such so as to ensure plug flow throughout the purge vessel at least until entry into the cooling portion.

As has been indicated above, it is preferred to withdraw particulate polymer from the purge vessel using means to withdraw the polymer continuously. Likewise, the preheating vessel and/or the cooling vessel are preferably equipped with means to withdraw the polymer continuously, for example using motorised valves or motorised screws. Preferably the withdrawal means are variable rate withdrawal means, for example, using variable speed motorised valves and/or a vibrating table. The vessel(s) is/are preferably equipped with means to detect the quantity or level of particulate polymer therein, for example a means to detect the quantity or level of settled particulate polymer in the vessel(s). Preferably the means to detect the quantity or level of particulate polymer within the vessel(s) is coupled with the variable rate withdrawal means, for example, to maintain a constant volume of particulate polymer within the vessel(s). The coupling may be achieved, for example, by electronic means or mechanical means.

If desired, the flow of particulate polymer through the cooling vessel can be plug

flow mode. Plug flow of the particulate polymer through the cooling vessel can be achieved by standard industrial means.

Particulate polymer suitably employed in the present invention can be, for example, polymer powders which are the direct products of polymerisation processes, provided that such polymer powders have been substantially freed from unreacted monomer in an earlier separation step, for example, the powder produced from gas fluidised bed polymerisation of olefins or from particle form processes for polymerising monomers in a liquid diluent. Preferred polymer particles are polymer pellets which are well known in the art as a standard product employed for the fabrication of polymeric articles. The size of the polymer particles is suitably in the range 0.1 to 10 mm, preferably in the range 2 to 7 mm. For example, polymer pellets employed in the fabrication of plastics articles generally lie in the range 3 to 6 mm.

Preferably the polymer particles comprise one or more polyolefins. Preferred polyolefins are polyethylene, polypropylene, and copolymers of ethylene with one or more C<sub>3</sub> to C<sub>12</sub> alpha olefins. Examples of such polymers are high density polyethylene, medium density polyethylene, linear low density polyethylene and very low density polyethylene (VLDPE).

The present invention will now be illustrated with reference to the accompanying drawings wherein Figure 1 represents diagrammatically a first embodiment of apparatus for reducing the volatiles content of linear high density polyethylene (HDPE) pellets prepared from HDPE powder made by the gas phase fluidised bed polymerisation of ethylene.

Figure 1 shows a purge vessel 1, to which is fed from an extruder (not shown) a continuous stream of pellets via inlet pipe 3, with any excess being transferred to a buffer silo via line 5. In this particular example, the pellets are introduced at a rate of 6 tonnes/hour, and purge vessel 1 has a diameter of 4.5m and an internal volume of 150m<sup>3</sup>. Hot air from line 14 is introduced at points 12, having been heated by steam from line 16. This air blows upwards through the mass of pellets, and maintains the temperature inside the purge vessel at 90°C. Plug flow is ensured by the discharge valve, which is in the form of an upturned cone. In this particular embodiment, the valve is not continuously open, but instead opens and closes for 2 minutes at a time. It was found that in this arrangement such a regime ensured plug flow. The treated pellet

discharges into hopper 18 and thence into a cooling vessel 20, which is cooled to 40-60°C by water from line 22. Finally, the cooled pellets are discharged into an air conveyor line 24.

In Figure 2 a similar arrangement is shown, with a purge vessel 1, fed continuously from an extruder via inlet pipe 3. In this example the rate of pellet feed is 30 tonnes/hour, and the purge vessel 1 has a greater internal volume of 700m<sup>3</sup>, and a different system of both discharge and hot air input. Hot air from line 14, heated by steam from line 16, is introduced at three separate points 11, 12 and 13. In this particular example, the relative rates of input are 5kg/s at point 11, 17kg/s at point 12 and 1kg/s at point 13. It should be noted that points 12 and 13 are representative of a number of inlets, typically 3-5, spaced around the diameter of the purge vessel at the same level. Introducing the major proportion of hot air at point 12 ensures that the pellets are satisfactorily heated when as they enter the purge vessel; the inlet at point 11 prevents a cold spot in the centre of the vessel. It has been found that introducing a substantial flow of air at the top of the vessel means that only a small flow is required at the bottom at point 13, where a relatively greater pressure is required. As in the example of Figure 1, the temperature inside the purge vessel is maintained at 90°C. Residence time for HDPE pellets is typically 10-12 hours. The manner of discharge from the vessel 1 is also different from that of Figure 1. Instead of an internal valve arrangement, there is a continuous discharge through opening 17, with plug flow being ensured by calculation of the dimensions and angle of tapered portion 15 of the purge vessel. As before, the treated pellet discharges into hopper 18 and thence into a cooling vessel 20, which is cooled to 40-60°C by water from line 22. The cooled pellets are then discharged into an air conveyor line 24.

## Claims

1. A process for the separation of volatile material from particulate polymer which has been substantially freed from unreacted monomer in an earlier separation step, comprising

(a) feeding the particulate polymer to a purge vessel and causing it to move through  
5 the vessel in substantially plug-flow mode,

(b) heating the particulate polymer in the purge vessel to a temperature greater than 30°C but insufficiently high to cause the particles to become agglomerated, and/or maintaining the polymer at a temperature in this range in the purge vessel,

(c) feeding gas to the purge vessel counter-current to the movement of the particulate  
10 polymer to remove volatile material therefrom,

(d) removing the particulate polymer from the purge vessel,

wherein substantially all of the heating of the particles which occurs in the purge vessel is accomplished by preheating the gas fed into the purge vessel.

2. Process according to claim 1 wherein at least a portion of the gas fed to the purge  
15 vessel enters the vessel at one or more points located closer to the top of the vessel than to the bottom.

3. Process according to claim 2 wherein at least 80% of the total gas flow entering the vessel does so at said one or more points located closer to the top of the vessel.

4. Process according to claim 3 wherein said one or more points located close to the  
20 top of the vessel are located at a level such that less than 20% of the volume of particles in the vessel lie above that level when the vessel contains the maximum quantity of particulate polymer.



5. Process according to any preceding claim wherein no more than 20% of the total mass of gas entering the vessel does so at close to the bottom of the vessel.
6. Process according to any preceding claim wherein no more than 10% of the total mass of gas entering the vessel does so at close to the bottom of the vessel.
- 5 7. Process according to any preceding claim wherein part of the gas entering the purge vessel is discharged directly into the middle of the vessel at the same level as the point of entry of the gas entering at one or more points located closer to the top of the vessel.
8. Process according to claim 7, wherein the gas discharged directly into the middle  
10 of the vessel is discharged from an axially extending conduit.
9. Process according to claim 7 or 8, wherein the mass flow of gas discharged directly into the middle of the vessel is 20-40% of that discharged into the side of the vessel at the same level.
10. Process according to any preceding claim, wherein the particulate polymer is in  
15 the form of pellets.
11. Process according to any preceding claim wherein the discharge from the purge vessel comprises a frustoconical portion having an opening at its bottom, on which portion is seated a valve in the form of an upturned cone, thereby defining an annular passageway when the valve is open.
- 20 12. Process according to claim 11 wherein discharge through said valve is intermittent due to opening and closing of the valve.

25

30

ABSTRACT  
POLYMER TREATMENT

A process for the separation of volatile material from particulate polymer which has been substantially freed from unreacted monomer in an earlier separation step, comprising

- (a) feeding the particulate polymer to a purge vessel, optionally causing it to move through the vessel in substantially plug-flow mode,
  - (b) heating the particulate polymer in the purge vessel to a temperature greater than 30°C but insufficiently high to cause the particles to become agglomerated, and/or maintaining the polymer at a temperature in this range in the purge vessel,
  - (c) feeding gas to the purge vessel counter-current to the movement of the particulate polymer to remove volatile material therefrom,
  - (d) removing the particulate polymer from the purge vessel,
- wherein substantially all of the heating of the particles which occurs in the purge vessel is accomplished by preheating the gas fed into the purge vessel.

Fig. 1



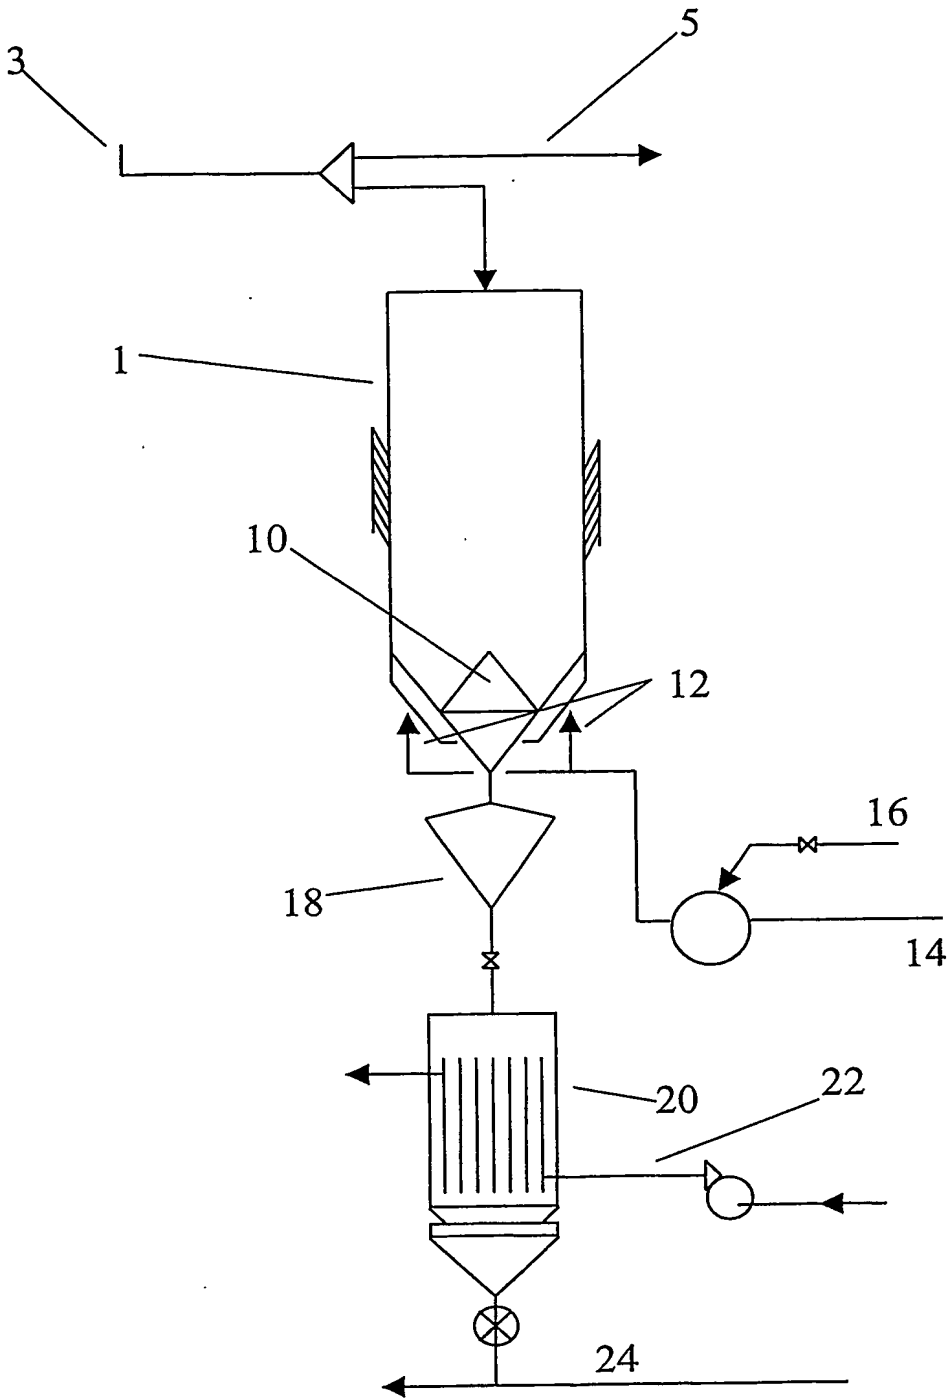


Fig. 2

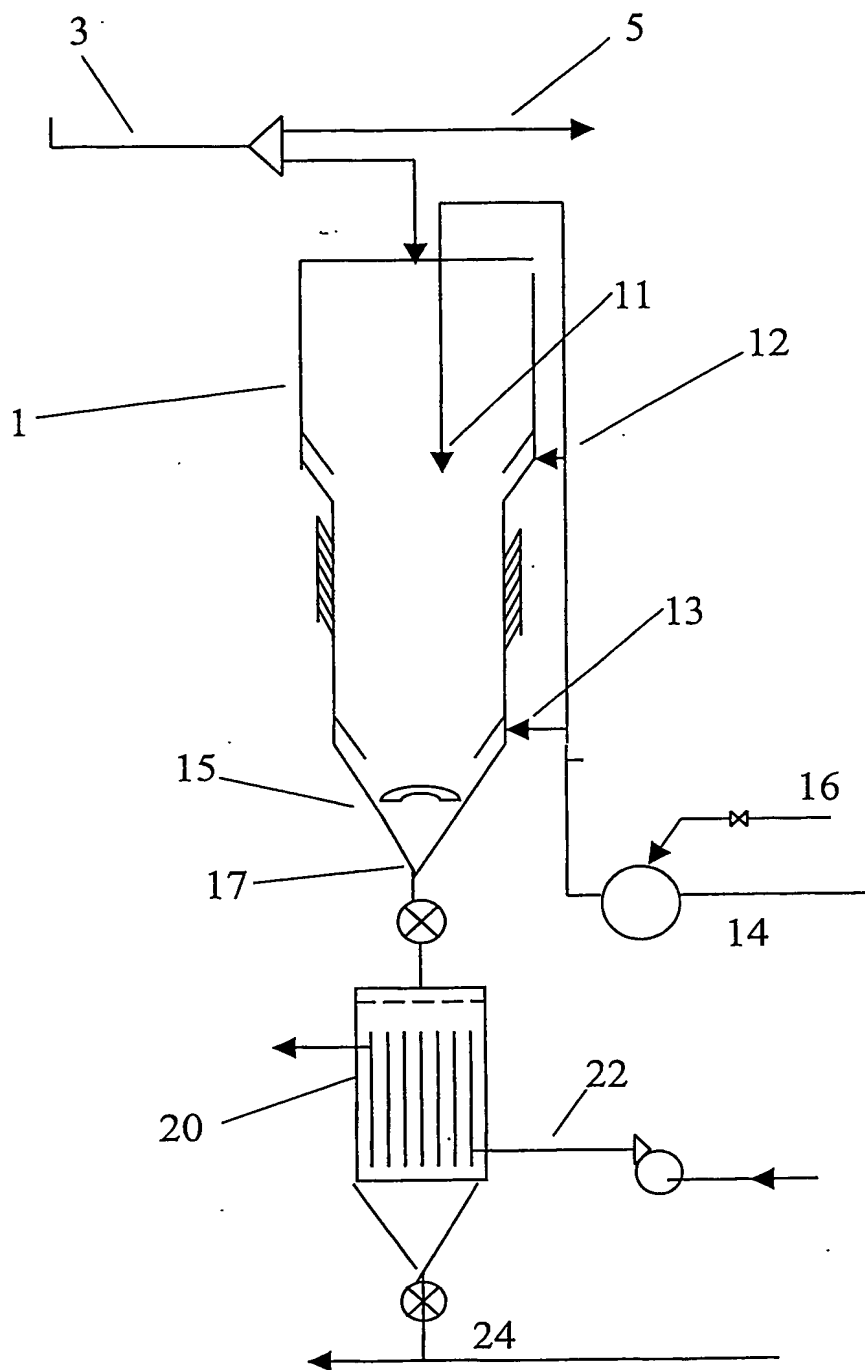

PCT Application

**EP0312041**



**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**